

## NUCLEON Satellite Mission. Present status.

D. Podorozhnyi<sup>a</sup>, E. Atkin<sup>b</sup>, V. Boreiko<sup>c</sup>, V. Bulatov<sup>d</sup>, N. Egorov<sup>e</sup>, S. Golubkov<sup>e</sup>,  
V. Grebenyuk<sup>c</sup>, A. Kalinin<sup>c</sup>, D. Karmanov<sup>a</sup>, N. Korotkova<sup>a</sup>, K. Kon'kov<sup>e</sup>, Yu. Kozlov<sup>e</sup>,  
E. Lyannoy<sup>f</sup>, M. Merkin<sup>a</sup>, A. Olshevski<sup>c</sup>, A. Pakhomov<sup>a</sup>, M. Panasyuk<sup>a</sup>, A. Pavlov<sup>f</sup>,  
S. Porokhovoy<sup>c</sup>, E. Postnikov<sup>a</sup>, A. Rinejskij<sup>f</sup>, T. Roganova<sup>a</sup>, A. Romanov<sup>f</sup>, B. Sabirov<sup>c</sup>,  
A. Sidorov<sup>e</sup>, A. Silaev<sup>b</sup>, L. Sveshnikova<sup>a</sup>, A. Tkachenko<sup>c</sup>, L. Tkatchev<sup>c</sup>,  
A. Turundaevskiy<sup>a</sup>, A. Vlasov<sup>d</sup> and A. Voronin<sup>a</sup>

(a) Skobel'syn Institute of Nuclear Physics, Moscow State University, Moscow, Russia

(b) Moscow Engineering Physics Institute (State University), Russia

(c) Joint Institute for Nuclear Research, Dubna, Russia

(d) HORIZONT, Ekaterinburg, Russia

(e) Research Institute of Material Science and Technology, Zelenograd, Russia

(f) DB "ARSENAL", Sankt-Peterburg, Russia

Presenter: D. Podorozhnyi (dmp@eas.sinp.msu.ru), rus-podorozhnyi-D-abs1-og15-poster

This paper presents the current status of the experiment NUCLEON aimed to the direct measurement of the elemental energy spectra of high-energy ( $10^{12}$ - $10^{15}$  eV) cosmic rays (CR) during 5 years (2008-2012) aboard the Russian regular satellite. The main goal of the project is to clarify the long-standing problems of CR origin sites, mechanisms of acceleration, peculiarities of diffusion in the Galaxy in the energy region near the knee. Advantages and peculiarities of the project are discussed.

### 1. Introduction

One of the most crucial problems in cosmic ray physics is the origin of the knee in the Galactic cosmic ray spectrum. The astrophysical reason of it remains still unknown, mostly due to an absence of reliable data about different nuclei components composing the all particle spectrum in the knee region, because it has been measured by a large number of ground-based extensive air shower (EAS) experiments, where the procedure of primary particle charge estimation is model and energy dependent. To improve a situation the data of individual elemental energy spectra from protons to nickel before the knee at energies 10 TeV – 1 PeV must be substantially improved. These elemental spectra comprise the signatures of the cosmic ray sources, acceleration mechanism and the parameters of CR diffusion in the Galaxy, such as the energy dependence of the diffusion coefficient  $D(E)$ . This dependence can be obtained from the secondary to primary nuclei ratio, and only if this dependence is known we can transform the observed near the Earth spectra to the primary spectra near the acceleration sites in the Galaxy. But this is a complicated task, because this ratio gradually decreases with energy as  $E^{-0.6-1.0}$  and can reach very small value. It seems that balloon and satellite experiments can help to do this work, but it could be done only with a large aperture apparatus and a long time exposure due to small intensity of nuclear species of CR at high energy.

But among the huge arsenal of modern experimental methods for energy measurement in energy region  $>1$  TeV only an ionization calorimeter (IC) method may be applied over a wide energy range for all CR nuclei ( $Z = 1 - 30$ ) simultaneously. But even a thin calorimeter (like CREAM or ATIC balloon installation) has very large weight ~ about 2-3 tons, and as a result these investigations become very expensive. So in [1, 2] the new method (Kinematic Lightweight Energy Meter) was proposed as a new approach to CR spectral measurements. KLEM method is based on event by event measuring the spatial density of flux of secondary charged and neutral particles produced in a vertex point of nuclear interaction in the carbon


target and passing through a thin tungsten gamma-converter [1,2]. The KLEM concept is now being realized in the NUCLEON project.

## 2. Device concept, space vehicle

A main idea of this project – to develop a method and to design a scientific instrument being able to measure elemental spectra of cosmic rays in a wide energy range  $10^{11}$ - $10^{15}$  eV with a high charge resolution. At the same time the principal condition is that this instrument should have relatively light weight (less than 200 kg) and a size (less than  $1.0 \text{ m}^3$ ) to be of use on regular serial Russian satellites as an additional load, that makes possible long duration (5 years) regular flights and provides the rather low price of the project. During last three years (2001-2003) R&D stage has been finished and at the beginning of the 2004 the Russian Federal Space Agency turned the project NUCLEON to the construction stage. In these years accelerator beam tests of various prototype NUCLEON systems and many sets of Monte-Carlo simulations were performed. As a result the design of the device was optimized, basing on the latest investigations and on new parameters of the satellite. The design of the device is presented in the next chapter, the results of the beam tests and Monte Carlo simulations are presented in an accompanying paper on this conference [6].

During R&D stage we have considered a possibility to arrange of the instrument on different satellites. As the most optimal for the NUCLEON project the new regular Russian COSMOS type satellite (Figure1) developed by “DB Arsenal” (St. Petersburg) was approved. In 2004 the optimization of the device was performed taking into account the facility of the Spacecraft, an integration with the satellite support and scientific purposes. The NUCLEON scientific facility consists of: NUCLEON scientific device; special mechanical/electronic system for NUCLEON device installation; an additional separate remote telemetry system; a separate antenna-feeder system; a cooling system. Power supply and NUCLEON complex control will be realized by the base satellite.

The NUCLEON instrument is planned to be launched in 2008 with the expected exposure time in an orbit not less than 5 years. Main technical limitations were approved: a total weight should be not more than 265 kg (for scientific device should be not more than 165 kg), a total complex power consumption must not exceed 150 W (for scientific device must not exceed 120 W), the nominal telemetry rates are expected to be 270 MB per day.

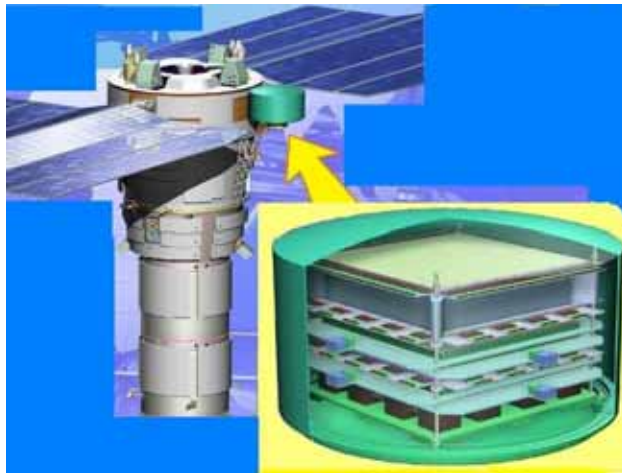

**Figure1.** COSMOS type satellite with NUCLEON system.

### 3. The structure of the NUCLEON device

The schematic view of the NUCLEON device design is shown in Figure 2. It includes the charge measuring system, the tracker and the energy measuring system, the trigger system, control electronics. All systems are mounted inside a pressurized container. The thickness of the container wall is equal to 2.5 mm of aluminum ( $\sim 0.7 \text{ g/cm}^2$ ), that is much less than a residual atmosphere in balloon experiments.

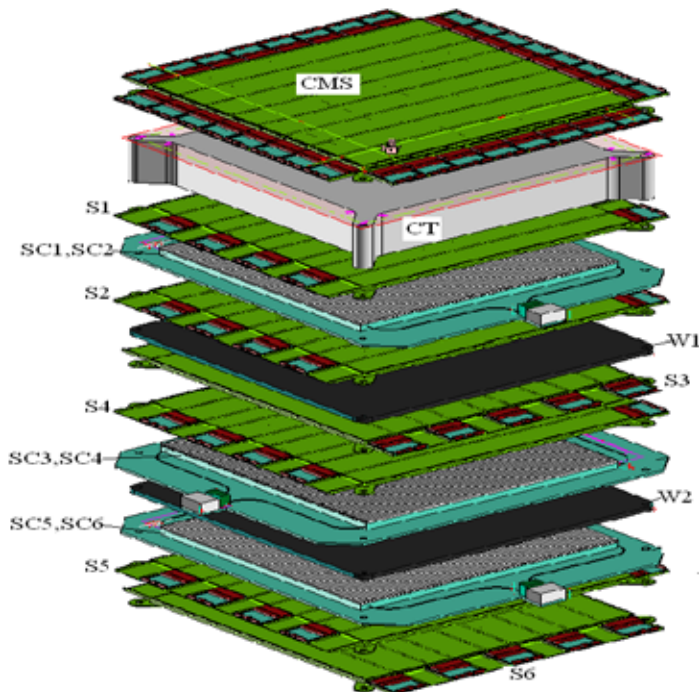


Figure 2. Schematic view of NUCLEON instrument

**The charge measuring system (CMS)** consists of 4 silicon detector layers occupied the volume  $53 \times 53 \times 2.5 \text{ cm}^3$ . Every silicon detector layer contains 64 subdetectors with the size  $6.2 \times 6.2 \times 0.3 \text{ cm}^3$ , every of which is divided by 16 pads with the size  $\sim 2.4 \text{ cm}^2$ . These layers are used for precise charge measurements. A fine segmented structure of the charge detector allows to decrease an influence of back scattered particles and 4 layers allow to minimize the ionization fluctuations. Results of detailed simulations and the test experiment [3] have shown that the charge resolution turned out to be about 0.3 unit of a charge that is enough to measure the primary to secondary nuclei ratio at high energy.

**The tracker and energy measuring system** consists of 8 elements: 6 identical layers of micro-strip silicon detectors (S1-S6), the carbon block (CT) with the size  $50 \times 50 \times 9 \text{ cm}^2$  being served as a target, 2 identical tungsten layers (W1, W2) with the size  $50 \times 50 \times 0.7 \text{ cm}^3$  being served as a gamma-converter. Every layer of silicon micro-strip detectors occupies a volume  $53 \times 53 \times 1.0 \text{ cm}^3$ . Every silicon micro-strip layer contains 72 detectors with the size  $6.2 \times 6.2 \times 0.3 \text{ cm}^3$ , arranged in 9 ladders with 8 detectors linked in series. A micro-strip pitch optimization has been done, and pitch size was reduced to 0.46 mm, to reduce a power consumption of the device. Our calculations shows: this pitch size does not lead to an essential degradation of the energy resolution [6]. A spatial density of secondary particles in every event is measured by the two lowest micro-

strip silicon layers (S5, S6). The energy of every incident particle is estimated basing on the parameter S [2] (method KLEM). Two prototype NUCLEON beam test experiments and full Monte-Carlo simulations [6] show that the accuracy of energy determination is about  $\sim 70\text{-}80\%$  in an individual event. The accuracy of track trajectory reconstruction at the level of charge detector comprises several mm depending on the arrival angle of a particle. A probability of wrong localization of a nuclear interaction vertex point in the target is less than  $< 8\%$ .

**The trigger system (SC1-SC6)** consists of three double layer 16-strip scintillator detectors (size  $\sim 500 \times 30 \times 0.5 \text{ mm}^3$ ) with a few 1 mm multicladding WLS KURARAY Y-11 fibers. Light signals are detected from an opposite side of each strip by 1 and 16-channel PMTs. Signals at the level of  $\sim 10$  photoelectrons are obtained from MIP particles. System of 1-channel PMTs is used to get the total amplitude signal from every scintillator plane in production of the 1-st level trigger signal during 50 ns. A few planes of scintillator strips were produced and tested with  $\beta$ -source  $^{90}\text{Sr}$ , cosmic muons and accelerator beams. Their mechanical stability was checked against of vibrations, strokes etc. expected at the launch.

**Control electronics** are placed at the bottom of the device in the box  $50 \times 50 \times 16 \text{ cm}^3$ .

#### 4. Scientific Objectives.

**The effective exposure factor** of NUCLEON instrument calculated for 5 year exposition is  $GT_{\text{eff}} = 170 \text{ m}^2\text{sr days}$  for protons and  $460 \text{ m}^2 \text{ sr days}$  for iron nuclei. It allows collecting statistics, being enough (together with a high charge resolution) to realize scientific objectives listed below, that provides the basis for understanding the origin of cosmic rays:

1. Measurement of the composition and spectra for individual elements in the largely unexplored high-energy region  $10^{12}\text{-}10^{15} \text{ eV}$
2. Measurement of secondary to primary ratios to determine the energy dependence of particle propagation in the Galaxy
3. Performance of 5 year monitoring of different CR nuclei arrival intensity in space.

#### 5. Acknowledgements

This work is supported by RFBR grant number 05-02-16783.

#### References

- [1] G. Bashindzhagyan et al., 26th ICRC, Salt Lake City, 5, 132, (1999)
- [2] N. Korotkova et al., Physics of Atomic Nuclei 65, No. 5, 852 (2002)
- [3] G. Bashindzhagyan et al., 28th ICRC, Tsukuba, OG.1.5, 2205, (2003)
- [4] G. Bashindzhagyan et al., 28th ICRC, Tsukuba, OG.1.5, 2209, (2003)
- [5] A. Turundaevskiy et al., 28th ICRC, Tsukuba, OG.1.5, 2213, (2003)
- [6] A. Turundaevskiy et al., 29th ICRC, Pune (2005) (submitted in this conference)