Incident Power : 1W
a1: 75mW
a2:
a3: 35mW (500mW output)
a4: 0.5mW
a5:

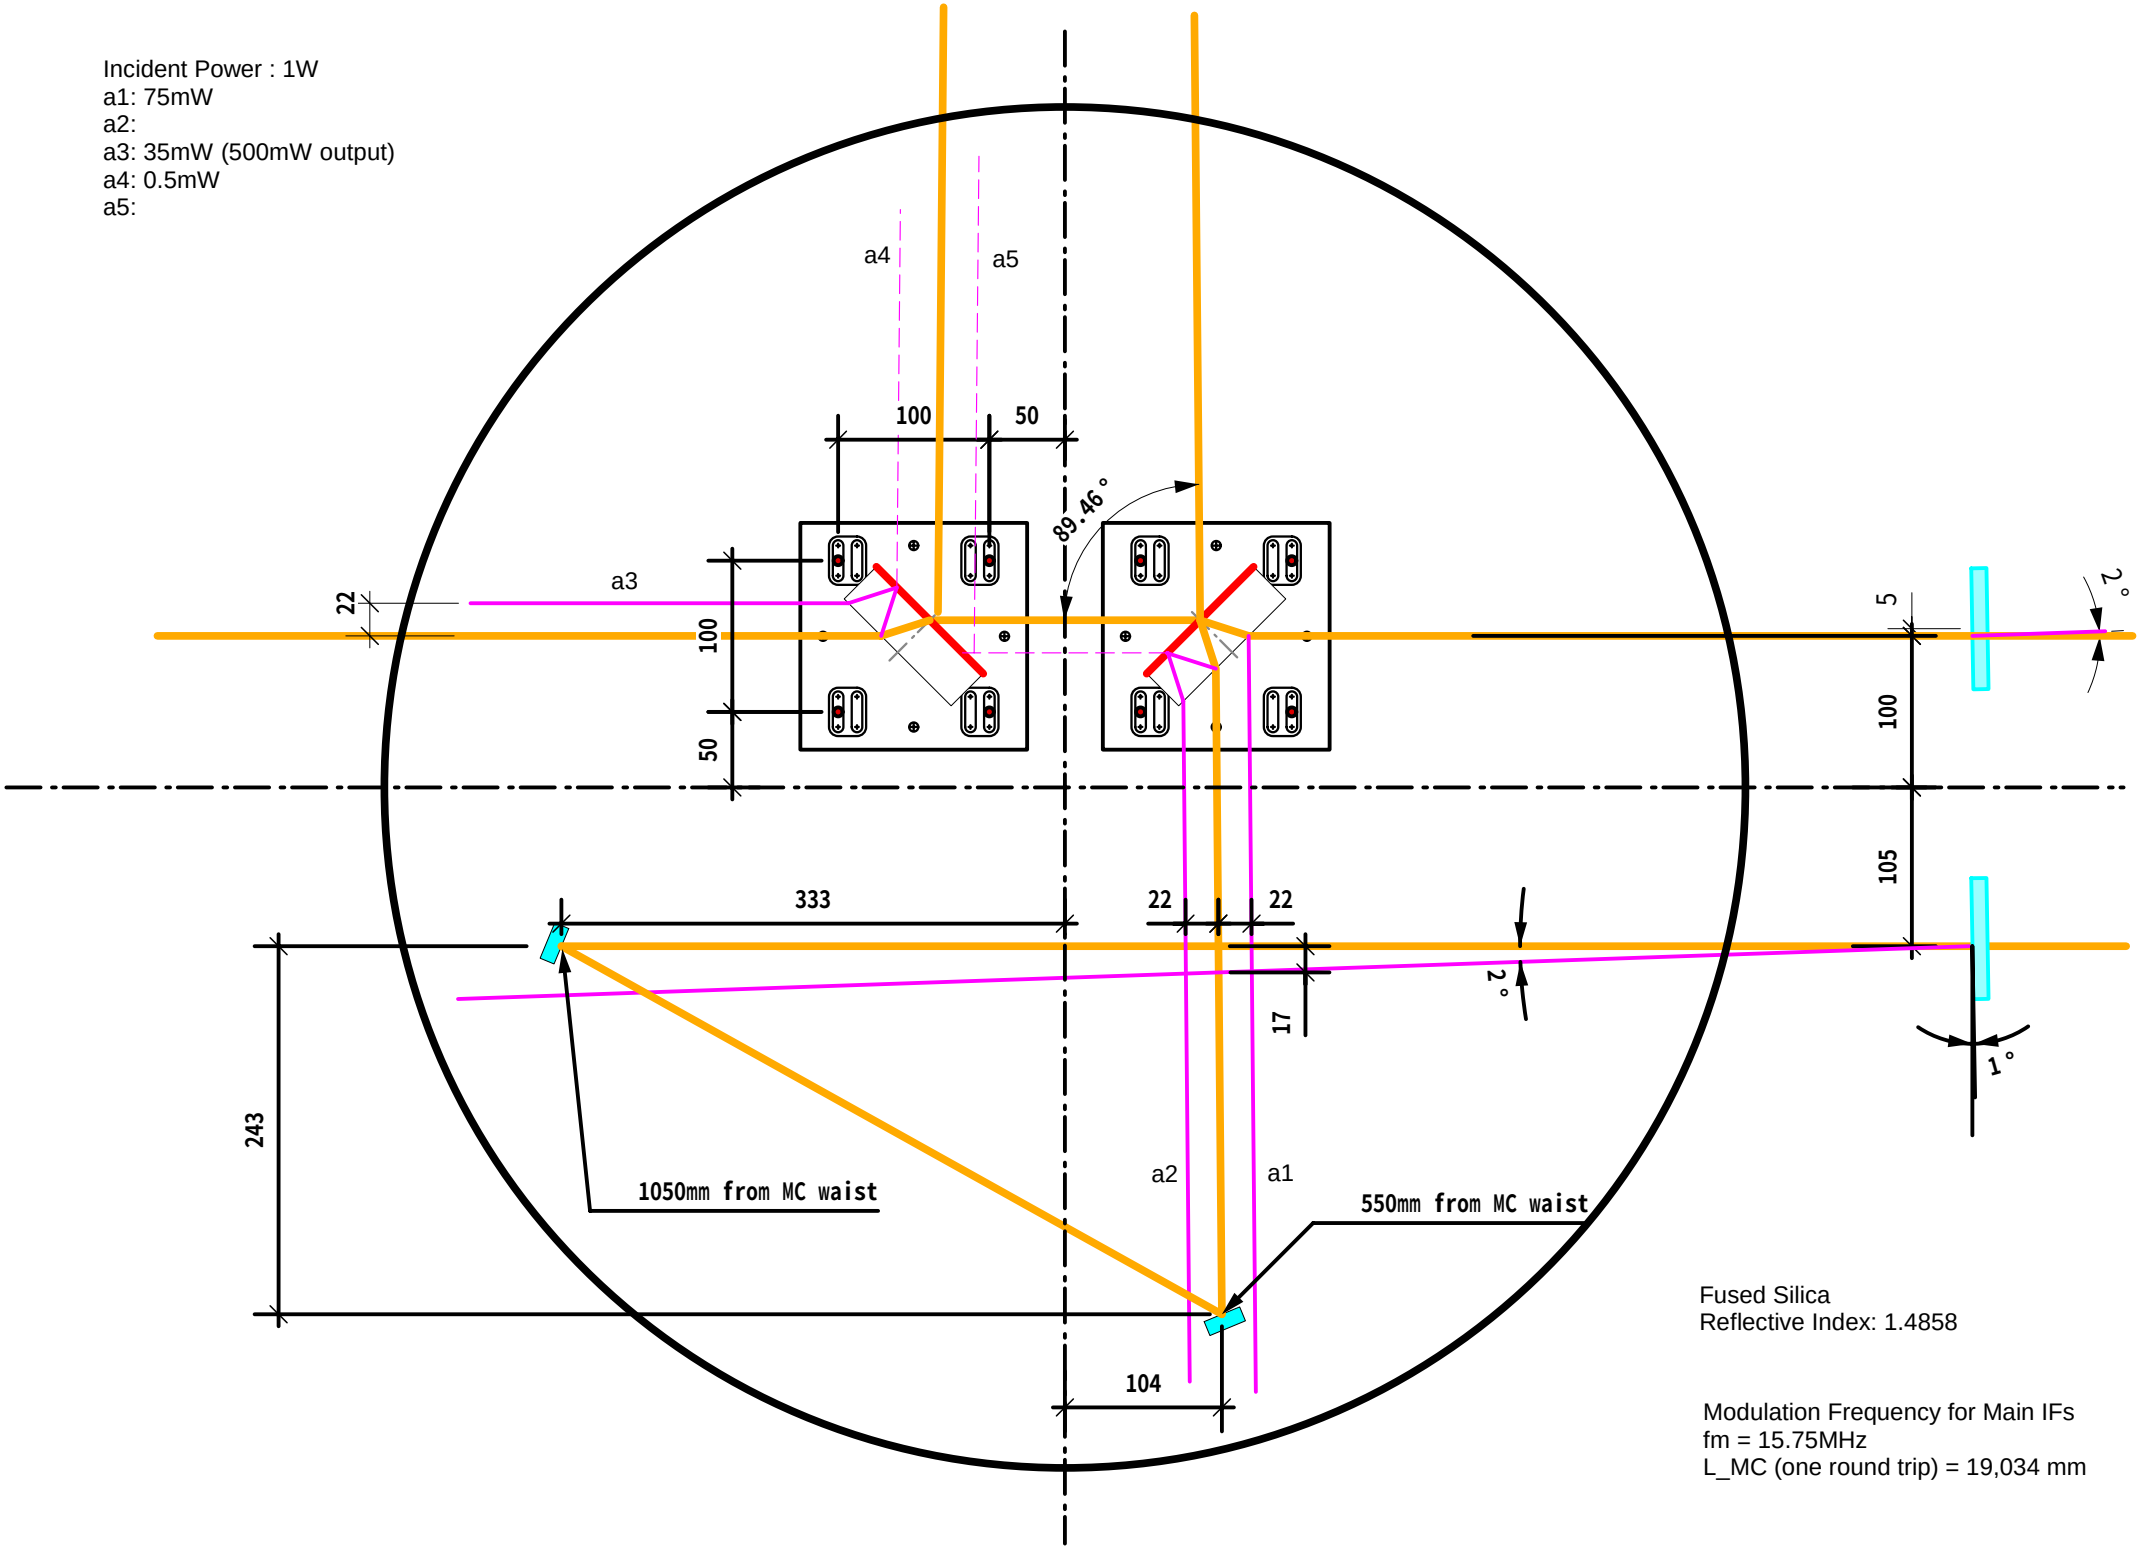

Fused Silica
Reflective Index: 1.4858

Modulation Frequency for Main IFs
fm = 15.75MHz
L_MC (one round trip) = 19,034 mm